



NSL

WRAPAROUND LIGHT

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE


OPTION

SPECIFICATION

SURFACE INSTALLATION
STEEL HOUSING
WHITE POWDER COAT POLYESTER PAINT FINISH
POLYESTER END CAP
POLYCARBONATE LENS
IP RATING: IP44
BEAM ANGLE 120°
WORKING TEMPERATURE: -20°C TO +40°C
INPUT VOLTAGE 120VAC 60HZ
CRI 80
CCT 4000K
L80-50 000HRS
SUITABLE FOR DAMP LOCATION
5-YEAR WARRANTY

MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Dimension (L * W *H) (INCH)	Voltage
NSL-42W-40K-120	42	5460	4000K	47.5 X 5.1 X1.9	120-277V

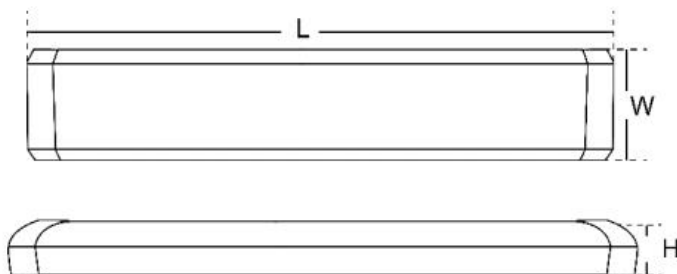

FEATURES

CONSTRUCTION

- Polycarbonate lens
- White powder coat
- Length: 4ft
- IP44
- Dimmable
- Linking up to 5 fixtures

ELECTRICAL

- 120/277 VAC 60Hz
- PF>0.93
- THD<15%

MOUNTING

- Surface mounting

COMPLIANCE

- ETLc
- DLC
- 5-Year Warranty

