



## AL

## ARCHITECTURAL LINEAR LIGHT

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

### SPECIFICATION

**ALUMINIUM EXTRUSION HOUSING**  
**POWDER COAT PAINT BLACK OR SILVER**  
**FOUR DIFFERENT LENGTH**  
**PEARLESCENT POLYCARBONATE LENS**  
**COLOR TEMPERATURE CCT 4000K, 5000K**  
**CRI 80 RA**  
**HIGH LUMEN OPTIONAL**  
**L80 ~ 50 000HRS**  
**BEAM ANGLE 120°**  
**WORKING TEMPERATURE -25°C ~+ 40°C**  
**IP RATING IP44**  
**POWER INPUT 120/277 VAC 347 VAC 60 HZ**  
**0/10V DIMMING**  
**5 YEAR WARRANTY**

#### OPTIONS ( MUST BE SPECIFIED)

DIM	Dimming
BK	Black Coat Finish
SR	Silver Coat Finish

### FEATURES

#### CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint black or silver
- Pearlescent polycarbonate lens
- Beam angle 120°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- 0/10v driver optional
- Standard Black cabtire 3/18AWG

#### ELECTRICAL

- Input voltage 120/277 VAC 347VAC 60HZ
- PF > 0.90
- THD < 20%
- 0/10 Dimming optional
- Ambient -25°C ~ +40°C

#### MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

#### COMPLIANCE


- ULc
- DLC
- FCC
- ROHS



## MODELS

Item Code	Watts(W)	Lumens ( LM)	CCT	Voltage
AL-30W-XXK-XXXV	30	2400	4000K/5000K	120-277 OR 347V
AL-40W-XXK-XXXV	40	3200	4000K/5000K	
AL-50W-XXK-XXXV	50	4000	4000K/5000K	
AL-80W-XXK-XXXV	80	6400	4000K/5000K	

## DIMENSIONS

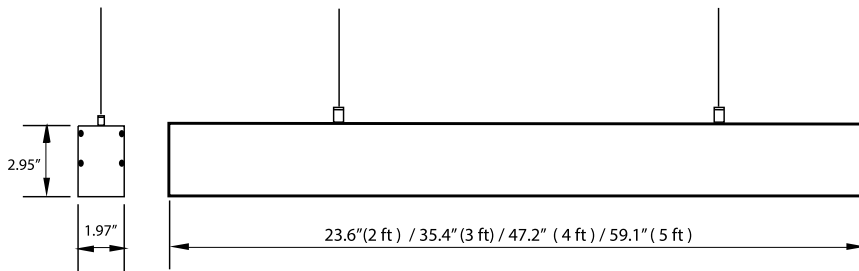

Watts(W)	Dimension	Weight (lbs)
30	23.6"X2.95"X1.97"	1.87
40	35.4"X2.95"X1.97"	2.42
50	47.2"X2.95"X1.97"	2.98
80	59.1"X2.95"X1.97"	3.85