



## AL02

## ARCHITECTURAL LINEAR LIGHT

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

### SPECIFICATION

**ALUMINIUM EXTRUSION HOUSING**  
**POWDER COAT PAINT BLACK OR SILVER**  
**PEARLESCENT POLYCARBONATE LENS**  
**COLOR TEMPERATURE CCT 4000K**  
**CRI 80 RA**  
**L80-50,000HRS**  
**BEAM ANGLE 90°**  
**WORKING TEMPERATURE 0°C ~+ 40°C**  
**IP RATING IP40**  
**POWER INPUT 100-240 VAC 60 HZ**  
**5 YEAR WARRANTY**

#### OPTIONS ( MUST BE SPECIFIED)

B	Black Coat Finish
S	Silver Coat Finish

### FEATURES

#### CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint black or silver
- Pearlescent polycarbonate lens
- Beam angle 90°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

#### ELECTRICAL

- Input voltage 100-240 VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient 0°C ~ +40°C

#### MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

#### COMPLIANCE


- UL
- cUL
- DLC
- FCC
- ROHS



### MODELS

Item Code	Watts(W)	Lumens ( LM)	CCT	Color	Voltage
AL02-40W-40K-120V-B	40	3200	4000K	Black	100-240V
AL02-40W-40K-120V-S	40	3200	4000K	Silver	100-240V

### DIMENSIONS

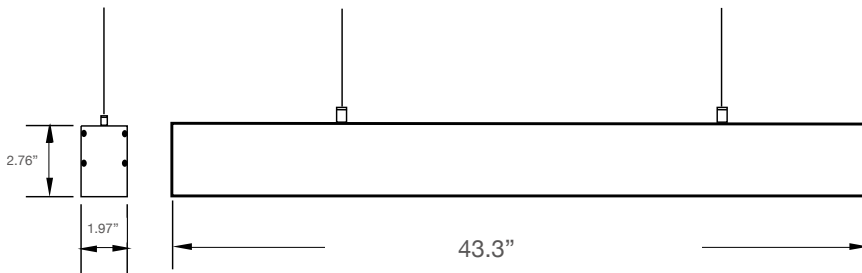

Watts(W)	Dimension	Weight (lbs)
40	43.3"X1.97"X2.76"	4.4