



AL02

ARCHITECTURAL LINEAR LIGHT

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

ALUMINIUM EXTRUSION HOUSING
POWDER COAT PAINT BLACK OR SILVER
PEARLESCENT POLYCARBONATE LENS
COLOR TEMPERATURE CCT 300K 4000K
SAMSUNG LED CHIP SMD2835
LUMEN OUTPUT > 100LM/W
CRI 80 RA
L80-50,000HRS
BEAM ANGLE 90°
WORKING TEMPERATURE -25°C ~+ 40°C
IP RATING IP44
POWER INPUT 100-240 VAC 60 HZ
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint black or silver
- Pearlescent polycarbonate lens
- Beam angle 90°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

ELECTRICAL

- Input voltage 100-240 VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient -25°C ~ +40°C

MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

COMPLIANCE

- UL
- cUL
- DLC
- FCC
- ROHS

OPTIONS (MUST BE SPECIFIED)


B	Black Coat Finish
S	Silver Coat Finish



MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Color	Voltage
AL02-40W-30K-120V-B	40	4000	3000K	Black	100-240V
AL02-40W-40K-120V-B	40	4000	4000K	Black	100-240V
AL02-40W-40K-120V-S	40	4000	4000K	Silver	100-240V

DIMENSIONS

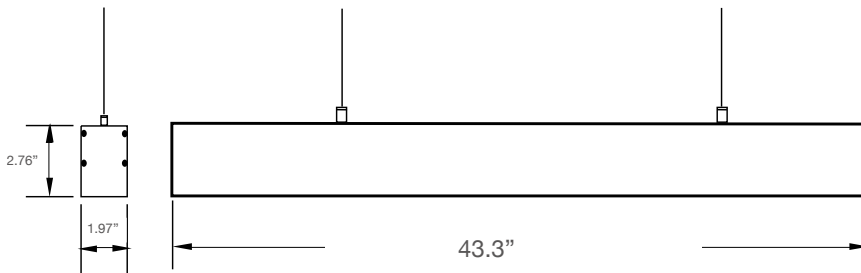

Watts(W)	Dimension	Weight (lbs)
40	43.3"X1.97"X2.76"	4.4