	<b>AL-C / CROSS LINEAR LIGHT</b>	
	PROJECT :	
	NOTE :	
	COMPANY NAME:	
TYPE:		DATE:
CATALOG NUMBER:		
_____	_____	_____
ITEM CODE	WATT	CCT
_____	_____	_____
_____	_____	_____
BEAM ANGLE	VOLTAGE	OPTION

## SPECIFICATION

**ALUMINIUM EXTRUSION HOUSING**  
**POWDER COAT PAINT BLACK OR SILVER**  
**PEARLESCENT POLYCARBONATE LENS**  
**COLOR TEMPERATURE CCT 4000K**  
**SAMSUNG LED CHIP SMD2835**  
**LUMEN OUTPUT > 100LM/W**  
**CRI 80 RA**  
**L80 50,000 HOURS**  
**BEAM ANGLE 120°**  
**WORKING TEMPERATURE -25°C ~+ 40°C**  
**IP RATING IP44**  
**POWER INPUT 100/240 VAC 60 HZ**  
**5 YEAR WARRANTY**

### OPTIONS (MUST BE SPECIFIED)

B	Black Coat Finish
S	Sliver Coat Finish

## FEATURES

### CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint black or silver
- Pearlescent polycarbonate lens
- Beam angle 120°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

### ELECTRICAL

- Input voltage 120/277 VAC 347VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient -25°C ~ +40°C

### MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

### COMPLIANCE


- UL
- cUL
- FCC
- ROHS



### MODELS

Item Code	Watts(W)	Lumens ( LM)	CCT	Color	Voltage
CB-40W-40K-120	40	4000	4000	Black	100-240 V
CS-40W-40K-120	40	4000	4000	Silver	

### DIMENSION

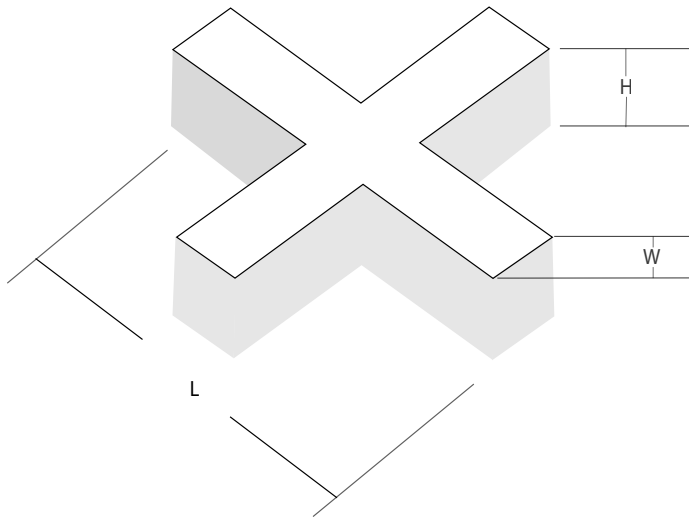

Watts(W)	Dimension (W*H* L)	Weight (lbs)	PCS/CTN
40	2.17"X2.76"X 16.54"	4.4	6