	AL-R / ROUND LINEAR LIGHT	
	PROJECT :	
	NOTE :	
	COMPANY NAME:	
TYPE:		DATE:
CATALOG NUMBER:		
_____	_____	_____
ITEM CODE	WATT	OPTION

SPECIFICATION

ALUMINIUM EXTRUSION HOUSING
POWDER COAT PAINT BLACK OR WHITE
PEARLESCENT POLYCARBONATE LENS
COLOR TEMPERATURE CCT 4000K
SAMSUNG LED CHIP SMD2835
LUMEN OUTPUT > 100LM/W
CRI 80 RA
L80-50,000HRS
BEAM ANGLE 120°
WORKING TEMPERATURE -25°C TO+ 40°C
IP RATING IP44
POWER INPUT 120/240 VAC 60 HZ
5 YEAR WARRANTY

OPTIONS (MUST BE SPECIFIED)

B	Black Coat Finish
W	White Coat Finish

FEATURES

CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint black or silver
- Pearlescent polycarbonate lens
- Beam angle 120°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

ELECTRICAL

- Input voltage 120/277 VAC 347VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient -25°C ~ +40°C

MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

COMPLIANCE


- UL
- cUL
- FCC
- ROHS



MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage	Color
RB-20W-40K-120V	20	2000	4000K	120V	Black
RW-20W-40K-120V	20	2000	4000K	120V	White
RB-40W-40K-120V	40	4000	4000K	120V	Black
RW-40W-40K-120V	40	4000	4000K	120V	White

DIMENSIONS

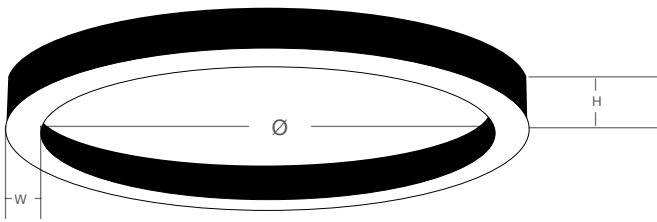

Watts(W)	Dimension (W*H* Ø)	Weight (lbs)	PCS/CTN
20	1.38"X0.98"X Ø 23.6"	7.7	3
40	1.38"X0.98"X Ø 39.4"	12.8	3