



AL-S

SQUARE LINEAR LIGHT

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

ALUMINIUM EXTRUSION HOUSING
POWDER COAT PAINT BLACK OR SILVER
PEARLESCENT POLYCARBONATE LENS
COLOR TEMPERATURE CCT 4000K
SAMSUNG LED CHIP SMD2835
LUMEN OUTPUT > 100LM/W
CRI 80 RA
L80-50,000 HOURS
BEAM ANGLE 120°
WORKING TEMPERATURE -25°C ~+ 40°C
IP RATING IP44
POWER INPUT 100/240 VAC 60 HZ
5 YEAR WARRANTY

OPTIONS (MUST BE SPECIFIED)

B	Black Coat Finish
S	Silver Coat Finish

FEATURES

CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint black or silver
- Pearlescent polycarbonate lens
- Beam angle 120°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

ELECTRICAL

- Input voltage 120/277 VAC 347VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient -25°C ~ +40°C

MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

COMPLIANCE



- UL
- cUL
- FCC
- ROHS



MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Color	Voltage
SB-40W-40K-120	40	4000	4000K	Black	100-240 V
SS-40W-40K-120	40	4000	4000K	Siver	
SB-60W-40K-120	60	6000	4000K	Black	
SS-60W-40K-120	60	6000	4000K	Silver	

DIMENSION

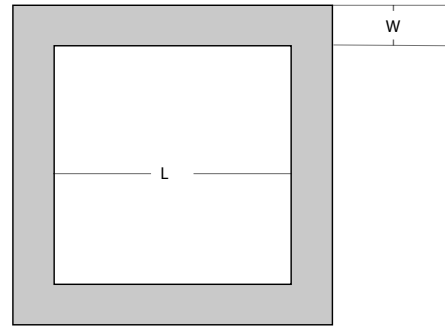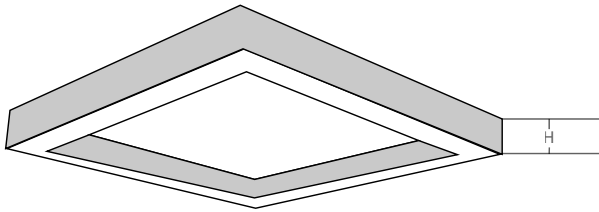

Watts(W)	Dimension (W*H* L)	Weight (lbs)	PCS/CTN
40	2.17"X2.76"X 11.81"	4.5	6
60	2.17"X2.76"X 23.62"	9.9	6