



## ALUD

## UP AND DOWN LINEAR LIGHT

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

### SPECIFICATION

**ALUMINIUM EXTRUSION HOUSING  
 PROVIDES UP AND DOWN LINEAR LIGHT  
 WATTAGE 40W: UP SIDE 10W / DOWN SIDE 30W  
 POWDER COAT PAINT BLACK OR WHITE  
 PEARLESCENT POLYCARBONATE LENS  
 COLOR TEMPERATURE CCT 4000K  
 LUMEN OUTPUT: 80LM/W  
 CRI 80 RA  
 L80-50,000 HOURS  
 BEAM ANGLE 120°  
 WORKING TEMPERATURE -25°C ~+ 40°C  
 IP RATING IP44  
 POWER INPUT 100/240 VAC 60 HZ  
 5 YEAR WARRANTY**

#### OPTIONS (MUST BE SPECIFIED)

B	Black Coat Finish
W	White Coat Finish

### FEATURES

#### CONSTRUCTION

- Aluminium extrusion housing
- Provides up and down light
- Aluminium end plate
- Powder coat paint black or white
- Pearlescent polycarbonate lens
- Beam angle 120°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

#### ELECTRICAL

- Input voltage 100-240VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient -25°C ~ +40°C

#### MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- Black feeder cable 3ft 3/18 AWG

#### COMPLIANCE


- UL
- cUL
- FCC
- ROHS



### MODELS

Item Code	Watts(W)	Lumens ( LM)	CCT	Color	Voltage
ALUD-40W-40K-120-B	40	3200	4000	Black	100-240V
ALUD-40W-40K-120-W	40	3200	4000	White	100-240V
ALUD-40W-30K-120-W	40	3200	3000	White	100-240V

### DIMENSION

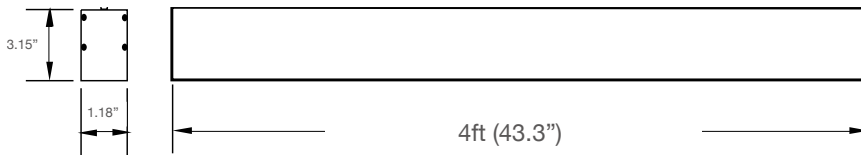

Watts(W)	Dimension (W*H* L)	Weight (lbs)	PCS/CTN
40	1.18"X3.15"X 43.3"	4.4	6