

## ALWD

## ARCHITECTURAL LINEAR LIGHT



PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE


OPTION

### SPECIFICATION

**ALUMINIUM EXTRUSION HOUSING**  
**POWDER COAT PAINT WOOD**  
**PEARLESCENT POLYCARBONATE LENS**  
**COLOR TEMPERATURE CCT 3000K**  
**SAMSUNG LED CHIP SMD2835**  
**LUMEN OUTPUT > 100LM/W**  
**CRI 80 RA**  
**L80-50,000HRS**  
**BEAM ANGLE 90°**  
**WORKING TEMPERATURE -25°C ~+ 40°C**  
**IP RATING IP44**  
**POWER INPUT 100-240 VAC 60 HZ**  
**5 YEAR WARRANTY**

### MODELS

Item Code	Watts(W)	Lumens ( LM)	CCT	Color	Voltage
ALWD-40W-30K-120V	40	4000	3000K	Wood	100-240V

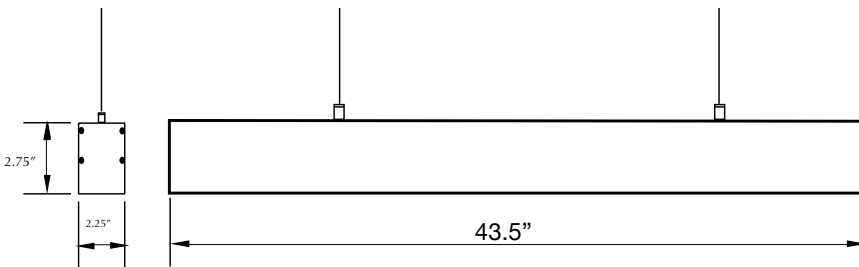

### FEATURES

#### CONSTRUCTION

- Aluminium extrusion housing
- Aluminium end plate
- Powder coat paint wood
- Pearlescent polycarbonate lens
- Beam angle 90°
- IP44 Construction
- 3 feet suspension adjustable aviation wire
- Standard Black cabtire 3/18AWG

#### ELECTRICAL

- Input voltage 100-240 VAC 60HZ
- PF > 0.90
- THD < 20%
- Ambient -25°C ~ +40°C

#### MOUNTING

- Aviation stainless steel cable 3ft
- Adjustable cables position on top of fixture
- feeder cable 3ft 3/18 AWG

#### COMPLIANCE

- UL
- cUL
- FCC
- ROHS