



CNP01

CANOPY LIGHT01

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

VERSION CEILING MOUNT CNP01
STANDARD 3 FT SOW 3/18 AWG
POWER EFFICIENCY > 90%
ALUMINIUM DIE CAST HOUSING
POLYCARBONATE LENS
IP GRADE: IP65
CCT: 4000K / 5000K
L70- 50 000HRS
POWER INPUT 120/277 VAC 60HZ
WORKING TEMPERATURE: -25°C ~+ 50°C
BEAM ANGLE: 120°
CRI >80 RA
LUMENS OUT: >120 LM/W
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- High pressure diecast housing
- Painted steel flip wings for easy ceiling surface mount
- Polycarbonate lens
- Side wire entry
- Standard cabtire 3/18AWG 3ft lens
- Ambient temperature: -25°C ~+ 50°C
- IP65
- Powder coat black
- Stainless steel hardware

ELECTRICAL

- Input voltage 120/277 VAC 60HZ
- PF > 0.95
- THD ≤ 20%
- 0-10V dimming optional
- 10 KV surge protector

MOUNTING

- Ceiling mounting
- Conduit pending

COMPLIANCE


- ULc
- DHC
- ROHS
- FCC



MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
CNP01-50W-XXK-120	50	6100	4000K/5000K	120-277
CNP01-80W-XXK-120	80	9760	4000K/5000K	

DIMENSIONS

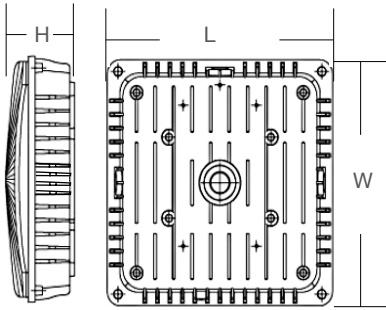

Watts(W)	Dimension (H*L*W)	Weight (lbs)
50	3.9"X10.2"X10.2"	4.4
80	3.9"X12.4"X12.4"	6.6