



CNP02

CANOPY LIGHT02

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

CANOPY FOR SURFACE INSTALLATION, CEILING ON WALL
ALUMINIUM DIE CAST HOUSING
DIE FORGE MOUNTING PLATE FOR EASY INSTALLATION, CONDUIT ENTRY ON YOKE
POLYCARBONATE LENS
IP GRADE: IP65
CCT: 4000K / 5000K
L70- 50 000HRS
WORKING TEMPERATURE: -25°C ~+ 50°C
BEAM ANGLE: 120°, TYPE V
INPUT VOLTAGE 120/277 VAC 60HZ
0/10V DIMMING OPTIONAL
PHOTO CONTROL OPTIONAL
CRI >80 RA
LUMENS OUT: >120 LM/W
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- High pressure die-cast housing
- Die forge steel plate for ceiling mount, conduit entry on Yoke
- 1 piece silicone gasket
- Standard CAB tire 3/18AWG 3ft lens
- Ambient temperature: -25°C ~+ 50°C
- IP65, IK08
- Powder coat paint finish black
- Stainless steel hardware

ELECTRICAL

- Input voltage 120/277 VAC 60HZ
- 0-10V dimming optional
- 10 KV surge protector optional

MOUNTING

- steel place for easy ceiling and wall mount adapt to junction box conduit entry 3/4" NPT
- Yoke mount for ceiling mount

COMPLIANCE


- ULc
- DHC
- ROHS
- FCC



MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
CNP02-50W-XXK-120	50	6100	4000K/5000K	120-277
CNP02-80W-XXK-120	80	9760	4000K/5000K	

DIMENSIONS

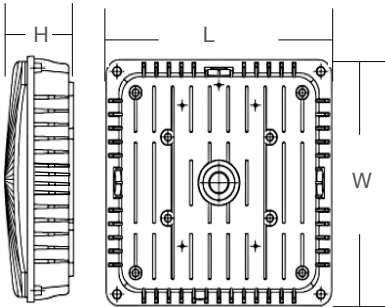

Watts(W)	Dimension (H*L*W)	Weight (lbs)
50	3.9"X10.2"X10.2"	4.4
80	3.9"X12.4"X12.4"	6.6

