


| | | | | | |
|---|-----------------------------------|-----|------------|---------|--------|
|  | EST / EMERGENCY COMBO UNIT | | | | |
| | PROJECT : | | | | |
| | NOTE : | | | | |
| | COMPANY NAME: | | | | |
| TYPE: | DATE: | | | | |
| CATALOG NUMBER: | | | | | |
| ITEM CODE | WATT | CCT | BEAM ANGLE | VOLTAGE | OPTION |


SPECIFICATION

ENERGY EFFICIENT LED 4.8W
DUAL VOLTAGE INPUT CAPABILITY 120/347 VAC
COME STANDARD WITH GREEN PICTOGRAM
CEILING, WALL OR END MOUNT INSTALLATION
INJECTION MOLDED OFF-WHITE THERMOPLASTIC
FAST INSTALLATION WITH SNAP TOGETHER DESIGN
TWO HEADS LIGHT 1.2W EACH FULLY ADJUSTABLE
RED LED MONITOR CHARGER
TEST SWITCH UNDER HOUSING FOR EASY ACCESS
FULLY AUTOMATIC SOLID STATE CHARGER
DURATION 90 MINUTES BATTERY BACKUP
GREEN PICTOGRAM
STANDARD WARRANTY 1 YEAR



Three pictogram legens for direction selection (single / double face)

DIMENSION

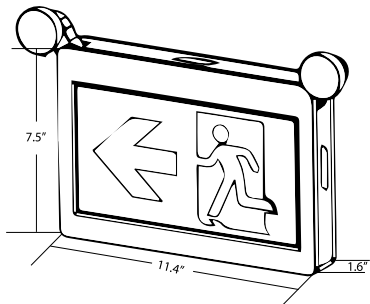

L*W*H (inch)

11.4 X 1.6 X 7.5

FEATURES

CONSTRUCTION

- Injection molded themoplastic
- Provision for wall, ceiling and double face mounting
- High impact UV stabilized THC
- Dry or damp location
- IP20
- Color: off-white

ELECTRICAL

- Dual power voltage input 120/347VAC
- 90 minute battery backup
- 4.8W consumption
- Fully automatic solid state charger
- Self compensating voltage reference chager
- Nickel cadmium battery pack
- 24 hours recharge after 90 minute discharge

MOUNTING

- Wall ceiling mount
- Wall and ceiling double face

COMPLIANCE

- ULc C22.2-NO141-10
- ULc SS70-2010



| Item Code | UPC | Voltage |
|---------------|-------|-----------|
| EST-P-120/347 | 10453 | 120V/347V |