

HBL01 / LINEAR HIGH BAY

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

VERSATILE SEAL INDUSTRIAL FIXTURE
IP65
IMPACT RATING IK08
CCT 4000K OR 5000K
CRI 80RA
WATTAGE 80 TO 240W
LM80 50 000HRS
WORKING TEMPERATURE -25°C ~ 50°C
TYPE V DISTRIBUTION 120° X 140°
0/10V DIMMING STANDARD
AVIATION WIRE SUSPENSION KIT INCLUDED
POWER INPUT 120/277 VAC 347 VAC 60HZ
CABTIRE 3FT STANDARD FOR POWER & 0/10V
UP TO 30 000 LUMENS
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- Dust proof unit
- Extruded aluminium housing
- Clear anodized finish
- Polycarbonate pearlescent lens
- Adjustable suspension loop
- Meanwell driver
- Injection mold plastic end cap
- IP65
- IK08
- Ambient temperature -25°C ~ 50°C
- Silicone rubber seal high temperature

ELECTRICAL

- Input voltage 120/277V or 347/480V 60HZ
- 0/10V dimming
- PF: > 0.90
- THD: < 12%
- 10KA surge protector 4KV line-line 6KV line-heart

MOUNTING

- Suspension

COMPLIANCE

- ULC
- DLC
- ICE-60929-Annex E
- ROHS




HBL01

LINEAR HIGH BAY

MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
HBL01-200W-XXK-XXXV	200	25000	4000K/5000K	120-277 Or 347
HBL01-240W-XXK-XXXV	240	30000	4000K/5000K	

DIMENSIONS

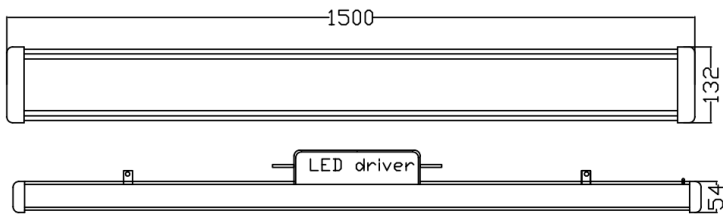

Watts(W)	Dimension
200 / 240	5.9"X5.2"X2.1"

OPTIONAL

Option	
MS	Motion sensor