

HBL03

SLIM HIGH BAY



PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

POWER EFFICIENCY: > 90%
CCT: 4000K, 5000K
COLOR RENDERING INDEX: CRI70
BEAM ANGLE 120° STANDARD 90° OPTIONAL
MATERIAL: ALUMINIUM & STEEL
WORKING TEMPERATURE -20°C TO 45°C
IP GRADE IP40
WORKING LIFE-SPAN: LM80-50 000HRS
LUMEN OUTPUT 125 LM/W STANDARD, 160LM/W OPTIONAL
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- Extruded aluminium fins steel housing
- White finish powder coat
- Polycarbonate lens
- Two axis T level standard
- IP40 damp location
- Adjustable mounting hardware

ELECTRICAL

- 120/277V or 347/480V
- 0/10V dimming optional
- PF: > 0.90 non flicker
- Motion sensor optional
- Ambient -20°C ~ 45°C

MOUNTING

- Suspension chainmount by others
- Ceiling mount
- Stem suspension

COMPLIANCE

- ULC
- DLC
- ICE-005
- 5 year warranty



HBL03


SLIM HIGH BAY

MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
HBL03-120W-XXK-XXXV	120	15000	4000K/5000K	120-277 Or 347
HBL03-200W-XXK-XXXV	200	25000	4000K/5000K	
HBL03-280W-XXK-XXXV	280	35000	4000K/5000K	
HBL03-400W-XXK-XXXV	400	50000	4000K/5000K	

DIMENSIONS

Watts(W)	Dimension (L*W*H) (Inch)	Weight (lbs)
120	17.7 X 15.0 X 2.4	11
200	23.6 X 15.0 X 2.4	14.3
280	35.4 X 15.0 X 2.4	19.8
400	47.2 X 15.0 X 2.4	28.6

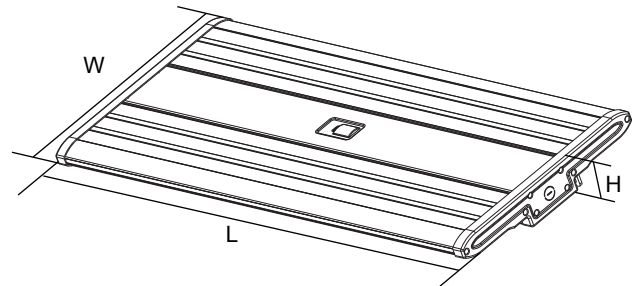

OPTION

CODE	OPTION
MS	Motion Sensor
COR	3 Feet 3/18 AGW CORD