	HBLT / TRI-PROOF HIGH BAY	
	PROJECT :	
	NOTE :	
	COMPANY NAME:	
TYPE:		DATE:
CATALOG NUMBER:		
_____	_____	_____
ITEM CODE	WATT	CCT
_____	_____	_____
BEAM ANGLE	VOLTAGE	OPTION

SPECIFICATION

SURFACE MOUNT CEILING OR WALL OR PENDANT
ALUMINIUM EXTRUSION HOUSING
POLYCARBONATE PEARLESCENT LENS
IP GRADE IP65
WATTAGE 30W, 50W
CRI 80RA
LIFE-SPAN L70 50 000HRS
INPUT VOLTAGE 120/277 VAC OR 347 VAC 60HZ
WORKING TEMPERATURE -25°C ~ +50°C
COLOR STANDARD WHITE
INSTALL CABTIRE 3/18 AWG 3FT
BEAM ANGLE 120° X 140° IES TYPE V
IK LEVEL IK08
LUMEN EFFICIENCY: >125 LM/W
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- Aluminium extrusion housing
- PC board LED
- Polycarbonate pearlescent lens
- IP65 construction
- Sealtite connector with cabtire 3ft
- Adjustable mounting clips for surface or pendant mounting
- Anodized aluminium natural finish
- Suspension aircraft cable included
- Silicone rubber seal gasket

ELECTRICAL

- Input voltage 120/277 VAC 347 VAC 60HZ
- PF: > 0.95
- THD: < 12%
- Ambient: -25°C ~ +50°C

MOUNTING

- Surface ceiling
- Wall mount
- Suspended with air craft cable included


COMPLIANCE

- ULc
- DLC
- ROHS



MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
HBLT-30W-XXK-XXXV	30	3750	4000K/5000K	120-277 Or 347
HBLT-50W-XXK-XXXV	50	6250	4000K/5000K	

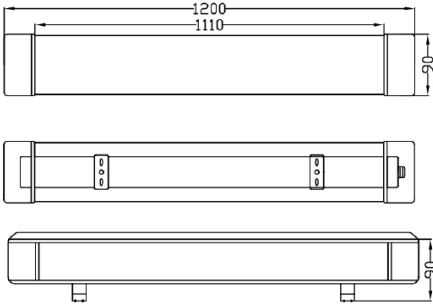

Watts(W)	Dimension (L * W * T)
30	2FT (600X90X90MM)
50	4FT(1200X90X90MM)

OPTIONAL

Mounting	
MC	surface ceiling
MW	wall mount
MS	suspended with air craft cable included