

MES

STEEL EMERGENCY LIGHT



PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION


SPECIFICATION

ENERGY EFFICIENT LED 4.0W
DUAL VOLTAGE INPUT CAPABILITY 120/347 VAC
COME STANDARD WITH GREEN PICTOGRAM
CEILING, WALL OR END MOUNT INSTALLATION
POWDER COAT STEEL HOUSING PAINTED WHITE
FAST INSTALLATION WITH SNAP TOGETHER DESIGN
RED LED MONITOR CHARGER
TEST SWITCH ON THE SIDE FOR EASY ACCESS
FULLY AUTOMATIC SOLID-STATE CHARGER
DURATION 90 MINUTES BATTERY BACKUP
WORKING TEMPERATURE 0°C – 40°C
STANDARD WARRANTY 1 YEAR



Three pictogram legends for direction selection (single / double face)

DIMENSION

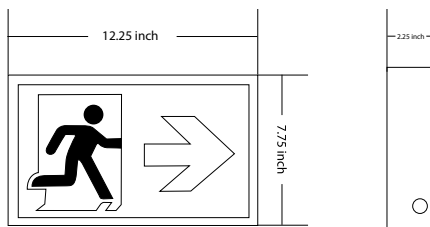

L*W*H (inch)	12.25 X 2.25X7.75
----------------	-------------------

FEATURES

CONSTRUCTION

- Steel housing powder coat painted white
- Provision for wall, ceiling and double face mounting,
- True removable knockout
- 3 Polycarbonate pictogram green
- Dry or damp location
- IP20
- Color: white finish

ELECTRICAL

- Dual power voltage input 120/347VAC
- 90 minutes battery backup
- 4W consumption
- Fully automatic solid-state charger
- Self compensating voltage reference charger
- Nickel cadmium battery pack
- 24 hours recharge after 90 minutes discharge
- Power factor 0.95

MOUNTING

- Provision for Wall mount
- Ceiling or wall double faces mounting true knockout
- And clip in accessories

COMPLIANCE



- ULc C22.2-NO141-10
- ULc SS70-2010

Item Code	UPC	Voltage
MES-P-120/347	10026	120V/347V