	MEST / STEEL EMERGENCY COMBO UNIT				
	PROJECT :				
	NOTE :				
	COMPANY NAME:				
TYPE:		DATE:			
CATALOG NUMBER:					
ITEM CODE	WATT	CCT	BEAM ANGLE	VOLTAGE	OPTION


SPECIFICATION

ENERGY EFFICIENT LED 4.0W
DUAL VOLTAGE INPUT CAPABILITY 120/347 VAC
COME STANDARD WITH GREEN PICTOGRAM
CEILING, WALL OR END MOUNT INSTALLATION
POWDER COAT STEEL HOUSING PAINTED WHITE
2 ADJUSTABLE FLOODLIGHT HEADS X 1.2W
FAST INSTALLATION WITH SNAP TOGETHER DESIGN
RED LED MONITOR CHARGER
TEST SWITCH ON THE SIDE FOR EASY ACCESS
FULLY AUTOMATIC SOLID-STATE CHARGER
DURATION 90 MINUTES BATTERY BACKUP
WORKING TEMPERATURE 0°C – 40°C
STANDARD WARRANTY 1 YEAR



Three pictogram legens for direction selection (single / double face)

DIMENSION

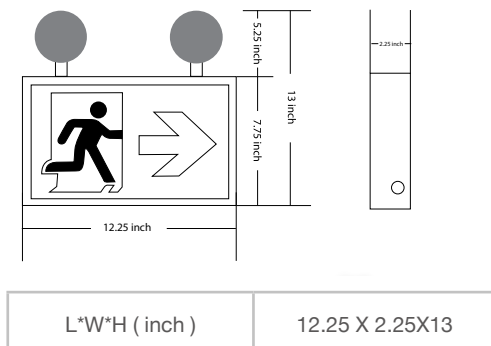

FEATURES

CONSTRUCTION

- Steel housing powder coat painted white
- Provision for wall, ceiling and double face mounting,
- True removable knockout
- 3 Polycarbonate pictogram green
- 2 polycarbonates adjustable LED heads X 1.2W
- Dry or damp location
- IP20

ELECTRICAL

- Dual power voltage input 120/347VAC
- 90 minutes battery backup
- 4W consumption
- Fully automatic solid-state charger
- Self compensating voltage reference charger
- Nickel cadmium battery pack
- 24 hours recharge after 90 minutes discharge
- Power factor 0.95

MOUNTING

- Provision for Wall mount
- Ceiling or wall double faces mounting true knockout
- And clip in accessories

COMPLIANCE



- ULc C22.2-NO141-10
- ULc SS70-2010

Item Code	UPC	Voltage
MEST-P-120/347	10025	120V/347V