



WP2

CUTOFF WALL PACK

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

WALL SURFACE MOUNT WITH REAR, TOP & SIDE ACCES
DIE CAST ALUMINIUM HOUSING
PRISMATIC BOROSILICATE GLASS
WATTAGE 50W, 80W, 100W
IP GRADE IP65
TYPE IV
OPERATING TEMPERATURE -25°C TO +50°C
CRI 80 RA
LUMEN OUTPUT: >120LM/W
WORKING LIFE SPAN L70-50 000HRS
INPUT VOLTAGE 120/277 VAC 347 VAC
BUTTON TYPE PHOTOCCELL OPTIONAL
IES TYPE IV
5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- Die cast aluminium housing
- Prismatic borosilicate glass
- Silicone gasket
- Powder coat paint black
- Threaded opening on top and sides

ELECTRICAL

- Input voltage 120/277 VAC 347 VAC 60HZ
- PF: > 0.95
- THD: < 12%
- Ambient -25°C to +50°C

MOUNTING

- Surface wall mount over junction box (by others)
- Or conduct entry top & sides

COMPLIANCE

- ULc
- DLC
- ROHS




MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
WP2-50W-XXK-XXXV	50	6000	4000K / 5000K	120-277 V OR 347V
WP2-80W-XXK-XXXV	80	9600	4000K / 5000K	
WP2-100W-XXK-XXXV	100	12000	4000K / 5000K	

DIMENSION

Watts (W)	Size (H*L*W) (Inch)
50	9.1 X 13.8 X 9.8
80	11.8 X 19.7 X 11.0
100	11.8 X 19.7 X 11.0

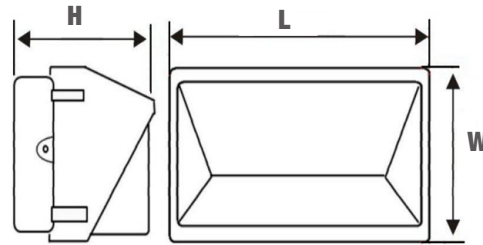

OPTION

OPTION	
PE	Photocell button type